

Couvrette's Mobile ATM Kiosk travels to any site location, providing a full-function ATM wherever it is needed. The Mobile ATM Kiosk is powered using a 5500W propane generator when electrical service is not available at the site. Local electrical and data lines may also be used. In the event that data lines are not working due to weather or other circumstances, the Mobile ATM Kiosk may use a customer-supplied wireless data system. Ideal for disaster recovery plans, sporting events, street festivals, and other remote gatherings, Couvrette's Mobile ATM Kiosk converts from a trailer to a full function ATM kiosk with integrated canopy. The system uses a four point electronic leveling system, and the retractable axle allows the kiosk to sit directly on the ground. Steel construction with an insulated ATM climate-controlled interior offers long life for the kiosk and ATM.

Dedicated to quality, Couvrette offers complete turnkey service and provides solutions for site planning, site construction, design, manufacturing, delivery, installation, service, and maintenance.

Features

Accommodates Most ATM Models

Powered by a 5500W propane generator with a 12V reserve battery backup.

Quiet operation with 60 hour stand-alone run time (two propane tanks) or 90 hours (three propane tanks).

Uses local electrical and data lines when available. Customer supplied wireless data system can be used when local lines are down.

High-end signage promotes your branding image.

Steel construction and insulated interior with AC/heating unit assures long life and withstands extreme weather conditions.

Four point electrical leveling system.

Folding towing tongue.


Rugged 2" x 3" (5.08 cm x 7.62 cm) steel trailer framing.

16" (40.64 cm) heavy duty wheels and tires.

Integrated 36" x 48-1/8" (91.44 cm x 122.24 cm) canopy; 84" (213.36 cm) clearance.

Turnkey Service from Concept to Completion

Mobile ATM Kiosk

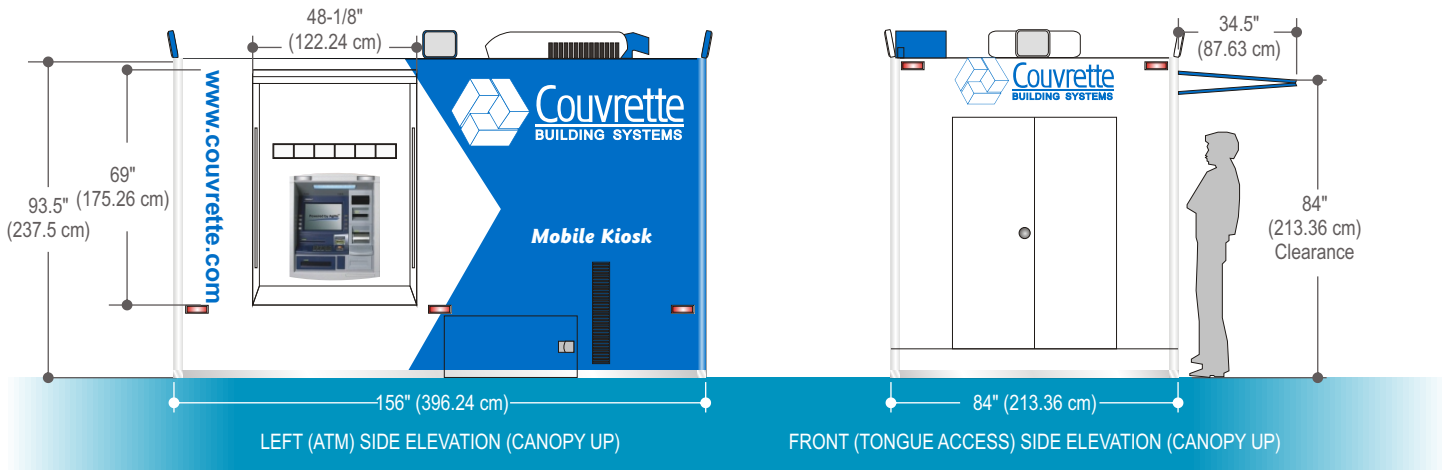

General Specifications

Kiosk Information

Kiosk Dimensions 13' L x 7' W x 93.5" H
(396 L x 213 W x 238 H cm)

Loaded Weight 6,300 lbs. (2857.6 kg)

Hauling Information and Recommendations

Tongue Weight 900 lbs. (454 kg) Max.
3/4 Ton Truck or SUV Minimum

Electric Brakes Brake Bias Controller Needed

Electrical Hook-up Standard 7-pin Plug

Power Source Information

Generator 5500W, 30A Service

Propane Capacity 60 Hours (2 tanks)
90 Hours (3 tanks)

Land Power Options Hook-up for Sites w/ a Propane Tank
220V, 30A Connection or
Two (2) 110V, 15A Power Outlets

Lighting

Security Lights Four (4) High Output Security
Flood Lights



Operational Position,
ATM Side



Service Room Access
Door



Rear Access Propane
Tanks



Front Access Towing
Tongue

ATMs shown are for illustrative purposes. The Mobile ATM Kiosk is designed to accommodate most ATMs. Contact Couvrette Building Systems for more information.

Turnkey Service from Concept to Completion

Headquarters
565 Electric Road • Salem, VA 24153
TEL (540) 375-2608 • FAX (540) 375-2638
February 19, 2007 Revision 4.0

EMAIL products@couvrette.com
WEB www.couvrette.com

California Office
8665 Argent St., Ste. D • Santee, CA 92071
TEL (619) 938-8000 • FAX (619) 938-8001